Liberty Platinum Sound System

Technical Specifications

MADE IN USA

ANCHOR®

SIX YEAR WARRANTY

Features

- Reach Crowds of 1,500+
- AC Mode = 125W / DC Mode = 100W
- Optional Single or Dual Built-in UHF Wireless with 16 User Selectable Channels
- Optional Built-In CD/MP3 Combo Player
- Remote Control for CD/MP3 Combo Player
- 3.5mm input for iPod®
- Comes with Standard Built-in Bluetooth
- USB Port for Charging MP3 Player/iPod
- Two Universal Microphone Input Jacks
- Recessed Back Panel Protects Knobs and Ports
- True AC/DC or AC only - 110/220V Power Supply
- Ceramic Compression Driver
- 10" Woofer
- Proprietary Class D Amplifier
- User Replaceable Battery
- Charging LED Bar Indicator
- Operates 6-8 hours on a Single Charge
- Speaker Out to Power Companion Speaker

AC Only Also Available

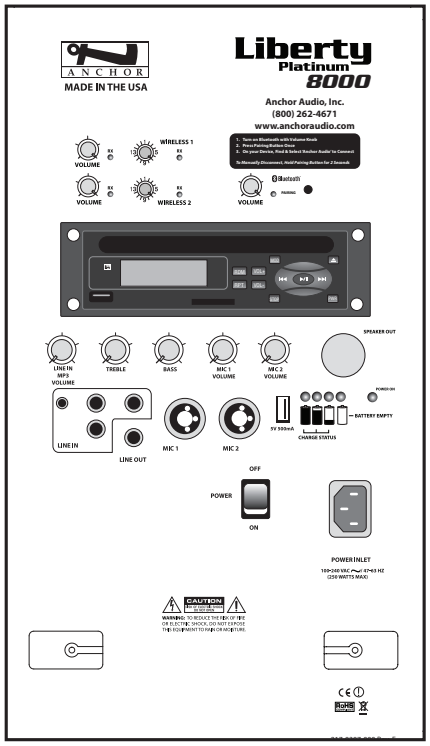

(LIB-8000CU2 Back Panel Shown)

LIBERTY MODELS AC/DC

LIB-8000	Liberty with Bluetooth
LIB-8000U1	Liberty with Bluetooth & 1 wireless receiver
LIB-8000U2	Liberty with Bluetooth & 2 wireless receivers
LIB-8000C	Liberty with Bluetooth & CD/MP3 combo player
LIB-8000CU1	Liberty with Bluetooth, CD/MP3 combo player & 1 wireless receiver
LIB-8000CU2	Liberty with Bluetooth, CD/MP3 combo player & 2 wireless receivers
LIB-8001	Unpowered companion speaker

UHF WIRELESS

WH-8000	Wireless handheld microphone/ transmitter (540-570 MHz)
WB-8000	Wireless body-pack transmitter (540-570 MHz) (requires handsfree microphone) Microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

TECHNICAL SPECIFICATIONS

Rated Power Output	125 watts AC / 100 watts DC
Max SPL @ Rated Power	117 dB
Battery	Two 12 V, lead acid rechargeable, 9.0 AH Full recharge: approx 7 hrs
Frequency Response	60 Hz – 15 kHz ± 3dB
Line Output (post fader)	isolated, 600 Ω, 1/4" phone
AC Power Reqs.	100 – 240 VAC, 50/60 Hz, 300W max
USB	5V 500mA
Dimensions (HWD)	22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)
Weight (AC/DC)	38 lbs / 17 Kg
Weight (AC only)	26 lbs / 12 Kg

Mic Inputs:	Lo-Z (1 KΩ), balanced, XLR 12 VDC condenser mic (phantom) power Hi-Z (10 KΩ), unbalanced, 1/4" phone Hi-Z (10 KΩ), unbalanced, 1/8" stereo
Line In	unbalanced, stereo RCA
Sensitivity For Rated Output	
Lo-Z Microphone	-52 dBV (2.5 mVrms)
Hi-Z Microphone	-43 dBV (7.5 mVrms)
Auxiliary (line)	-14 dBV (200 mVrms)
Phantom Power	36V
Speaker Out	4-pole Neutrik Speakon® jack

CE RoHS COMPLIANT

(Features & Specifications Subject to Change Without Notice)

Anchor Audio, Inc.

Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com