

Forza 720/720B

1. Outstanding luminance level, 800W AC Power Draw.
2. Wide CCT range of 2700-6500K for Forza 720B.
3. High color rendition scores: CRI 95, TLCI 96 for Forza 720, average CRI of 96, Average TLCI of 97 for Forza 720B .
4. Two output modes of Maximum Output mode and Constant Output mode for Forza 720B.
5. Bowens mount fixtures with expanded choices of light shaping tools.
6. Curved yoke with 360° rotation, provide expanded angles for tilting down.
7. Quick release clamp and plate, greatly improves attaching to light stands and other objects.
8. Dual power supply solutions with longer connection cable and advanced power management system.
9. Comprehensive control methods, including on-board, 2.4G, Bluetooth, NANLINK APP, DMX/RDM.



On-board



DMX



Bluetooth



2.4G



APP



NANLINK BOX



Forza 720

Forza 720B

Includes

Light × 1, Control Unit×1, Connecting Cable 5M×1, Power Cable 4.5M×1, Reflector×1, COB Protective Cap×1 , Quick Release Clamp×1, Carrying Bag×1, User Manual×1, DMX Reference Guide×1

Features



Top-ranking Illuminance Performance



V-Mount Batteries Accessibility



Versatile Umbrella Mount



Quick Release Clamp

Forza Bowens Mount LED Spot Light Accessories (Optional)



FL-20G Fresnel Lens with barndoor



BT-V-14.8V160
V-mount Battery 14.8V 160WH

BT-CGV-14.8V-1
Battery Charger for Single 14.8V V-mount Battery



SB-ST-140X30 Strip Softbox
SB-AS-110X45 Asymmetric Softbox
SB-RT-90x60 Rectangle SoftBox
EC-140X30/EC-110X45 Eggcrate (Optional)



BT-V-26V230/BT-V-26V270
V-mount Battery 26V 230WH/270WH


BT-CGV-26V-1/BT-CGV-26V-2
Battery Charger for Single/Dual 26V V-mount Battery



LT-80/LT-120
Lantern Softbox



CB-FZ-5 Forza 5M Connecting Cable
for Forza 200/300/300B/500

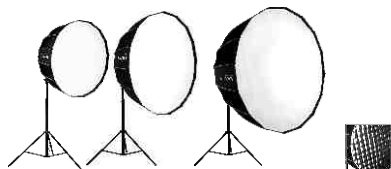

SB-PR-90/120-Q Quick Setup Parabolic Softbox
SB-PR-150 Parabolic Softbox
EC-PR90/120/150 Eggcrate(Optional)



RC-1 Remote Controller



U-135DS/U-165DT/U-180ST
Umbrella



WS-RC-C2 2.4G Remote Controller

Forza *Technical Data*

Model	<i>Forza 500</i>	<i>Forza 720</i>	<i>Forza 720B</i>
Rated Power	545W	800W	800W
Input Voltage/Current	DC48V/12.5A Max, AC100-240V 50/60Hz	DC48V/16.67A Max, AC100-240V 50/60Hz	DC48V/16.67A Max, AC100-240V 50/60Hz
CRI	98	95	Average 96
TLCI	95	96	Average 97
CCT	5600K	5600K	2700K-6500K
Dimming	0 to 100 % continuous	0 to 100 % continuous	0 to 100 % continuous
Control	On-board, 2.4G, DMX	On-board, 2.4G, Bluetooth, DMX/RDM	On-board, 2.4G, Bluetooth, DMX/RDM
Product Size	330 × 225 × 140mm / 12.99 × 8.86 × 5.51"	475 × 231 × 142mm / 18.7 × 9.09 × 5.59"	518 × 228 × 142mm / 20.39 × 8.98 × 5.59"
Product Weight	Light fixture	2.7 kg / 5.95 lb	4.8kg / 10.58lb
	Light Fixture +Control Unit	4.7kg / 10.36lb	9kg / 19.84lb

Illumination(lux / fc)

Model/CCT	<i>Forza 500(5600K)</i>			<i>Forza 720(5600K)</i>			<i>Forza 720B(5600K)</i>		
Distance	1M	3M	5M	3M	5M	7M	3M	5M	7M
Light Only	20070 lux 1865 fc	2276 lux 211 fc	888 lux 82 fc	3777 lux 351 fc	1629 lux 151 fc	903 lux 84 fc	3116 lux 289 fc	1407 lux 131 fc	716 lux 67 fc
With Reflector	93350 lux 8672 fc	8245 lux 766 fc	2933 lux 272 fc	10200 lux 948 fc	3945 lux 366 fc	2211 lux 205 fc	7919 lux 736 fc	3152 lux 293 fc	1714 lux 159 fc
With Fresnel lens Spot 10°	N/A	25656 lux 2383 fc	9001 lux 836 fc	24980 lux 2321 fc	8618 lux 801 fc	4340 lux 403 fc	17650 lux 1640 fc	6344 lux 589 fc	3234 lux 300 fc
With Fresnel lens Flood 45°	49960 lux 4641 fc	5822 lux 541 fc	2187 lux 203 fc	7832 lux 720 fc	3128 lux 291 fc	1787 lux 166 fc	7363 lux 684 fc	2884 lux 268 fc	1607 lux 149 fc